

Specification

Product Name: 24GHz TUYA Millimeter Lifebeing Sensor

Product Model: MSA201 Z

Product Version: V1.1



【Product Description】

MSA201 Z is a 24GHz radar sensor based on Merrtek patented orthogonal half-wave bending antenna. Its antenna has high gain and wide detection range and is combined with Merrytek's unique software algorithm. It can accurately detect minor movements brought by human in almost all indoor spaces and provide fast and accurate front-end sensing input for smart home, smart hotel, smart office and other scenes.

【Product Feature】

- The first Lifebeing detection created by Merrytek
- Accurately input human-existing/ no-human signals
- Accurately input ambient illuminance
- Support KNX wired communication
- International standard: 24Ghz ISM Band Millimeter Wave Radar
- Presence detection diameter: 6-8m Max
- Minor Moving detection diameter: 8-10m Max
- Moving detection diameter: 8-10m Max
- Presence, minor moving and moving detection range are highly coincide
- Round radiation. Effectively managing a whole space by a single product
- Switching time of no-human state to human-existing state: less than 0.5s
- Switching time of human-existing state to no-human state: more than 30s
- Support surfaced mounting and 86 box installation
- Set parameters by ETS
- Sensing function based on millimeter wave radar technology
- Low RF power output. No harm to human health
- Not affected by temperature, humidity, noise, airflow, dust, light and other environments



【Product Application】

- Health Care
- Smart Home
- Intelligent Lighting
- Smart Hotel
- Smart Energy Consumption Control
- Home Security


【Product Package】

- Dimension: $\phi 65 \times 49.5 \text{mm}$
- Wiring: 2-position terminal



【Parameter】

Input/Output	Voltage Range	220-240Vac 50Hz/60Hz
	Rated Voltage	220V AC
	Working Current	50mA max
	Working Power	≤1W 230V AC
	Communication Model	2.4GHz-2.484GHz ZigBee Transmitting Frequency: 10dB Receiving Sensitivity: -101±2dBm
Sensor Parameter	Transmitting Working Frequency	24GHz-24.25GHz ISM Wave.
	Transmitting Power	5mW Max.
	Detection Area	0% 25% 50% 75% 100% (set by APP or remote control MH10)
	Hold Time	30s /1min / 2min/ 3min /5min /10min /20min/30min (set by APP or remote control MH10)
	Daylight	When the change in ambient illuminance meets the preset illuminance difference, the sensor immediately reports the ambient illuminance value The change value: 10-100lux, set by APP
	Illuminance	5-1200Lux
	Detecting Range (100% detection area, radius)	Movement: 4-5m (at 3m height) Minor Movement: 4-5m (at 3m height) Presence: 3-4m (at 3m height)
	Mounting Height	2.5-4.0m typical value: 3m
	3db Beam Angle	100° (XZ field) 100° (YZ field)
Environment	Working Temperature	0℃...+50℃
	Storage Temperature	-25℃~+80℃
Certificate Standard	Certificate	FCC/RED
	Environmental Requirement	Compliant to RoHS
	IP Rating	IP20
Note: "N/A" means not available.		

【Dimension】

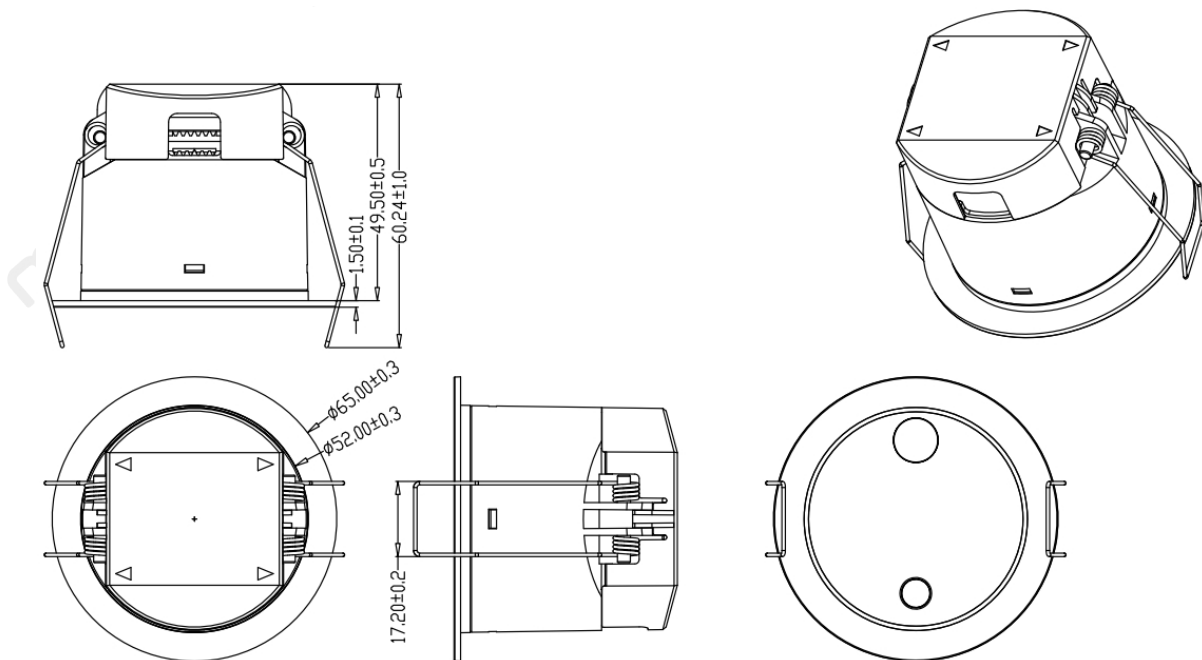

【Function & Wiring Diagram】

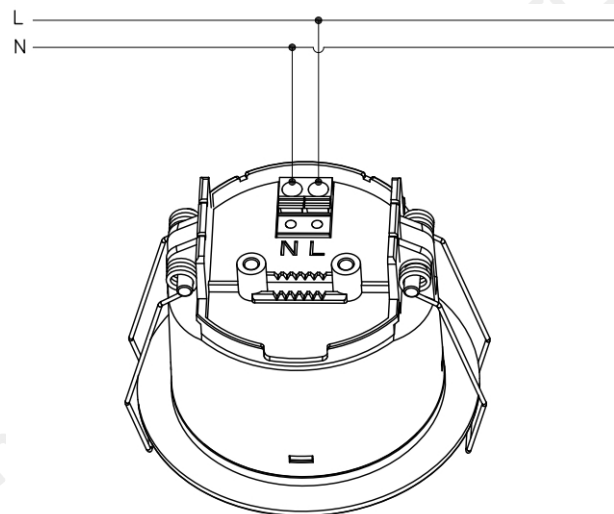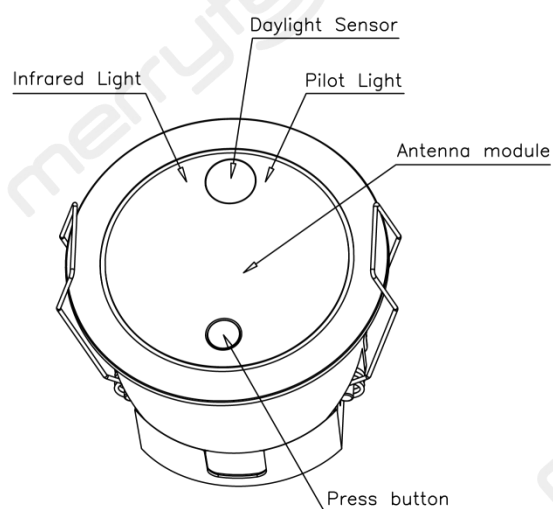


【Start Process & Initialization】

When the first power-on, indicator turns off after flashing for 20 seconds. Sensor does not detect moving signal during initialization. Turning ON/OFF indicator, hold time and detection area can be controlled by APP.


【Installation Instruction】

Surfaced Mounting

- (1) Opening 55mm
- (2) Use a flat-blade screwdriver to remove wiring cap
- (3) Connect wire to terminal
- (4) Press the power wires with the wire clip and fasten it with screws, and then cover the wiring cap
- (5) Bend the spring clip backwards to push product into the opening in ceiling
- (6) Ensure installation stable and reliable

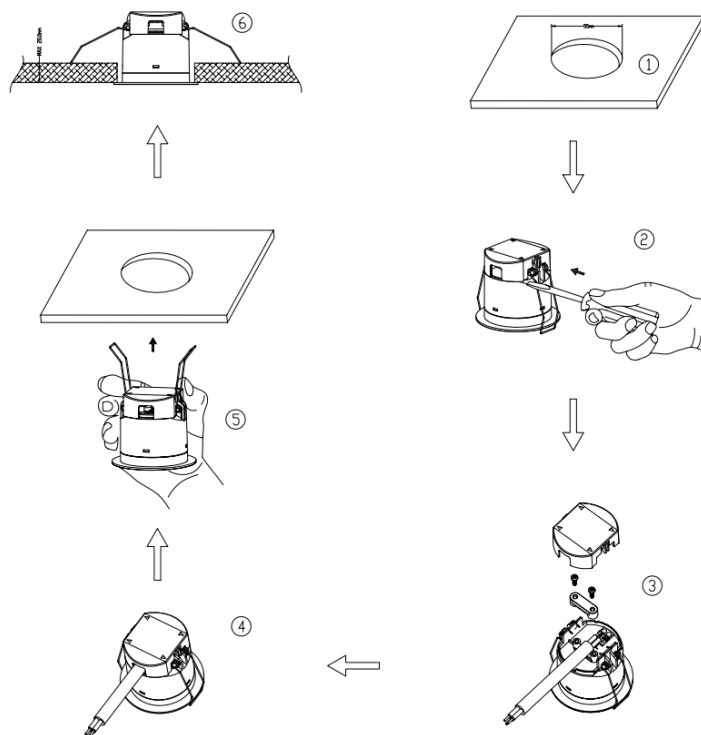


Box Installation Dimension:

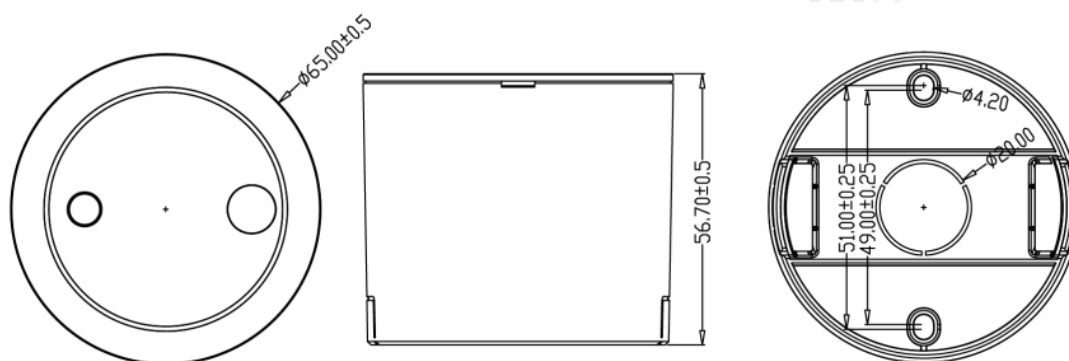

Box Installation

- (1) Cut the reserved thin wall with tool
- (2) Use matching screws to fasten the product to the mounting surface
- (3) Remove the wiring cover with a flat-blade screwdriver
- (4) Connect input wire with the terminal, and close the wiring cover and press the wire tightly.
- (5) Push the sensor into the ceiling mount, the buckle will fasten the sensor and prevent it from falling off
- (6) To separate the product from the ceiling mount, insert a flat-blade screwdriver into the removal notch, lift the flat-blade screwdriver, pry down with the tip of the blade, and the product will pop out of the ceiling mount
- (7) Ensure installation stable and reliable

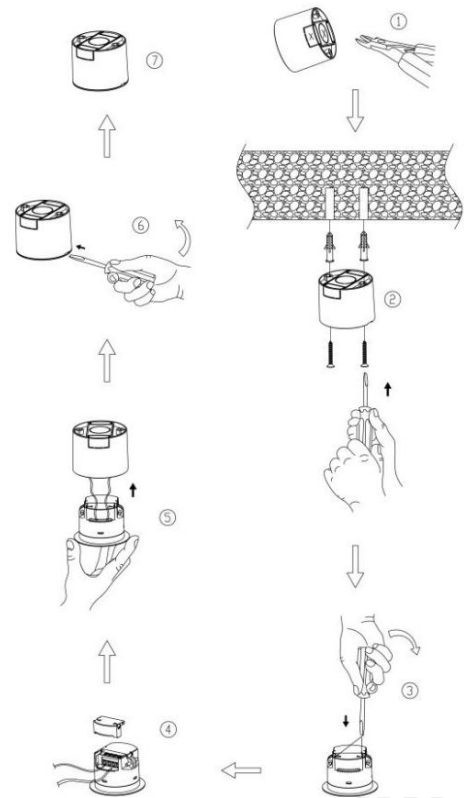

【Work Performance】

● Radiation:

The typical installation of MSA201 Z is ceiling mounting, and its radiation range is as follows:

Movement Detecting Function




1. Detection diameter: 8-10m, controlled by APP or remote control
2. Detecting Speed: <0.2m/s
3. Response time: <100ms

Minor Movement Detecting Function

1. Detection diameter: 8-10m; controlled by APP or remote control
2. Response time: <1s

Presence Detecting Function

1. Detection diameter: 6-8m; controlled by APP or remote control
2. Hold time is required more than 30S.

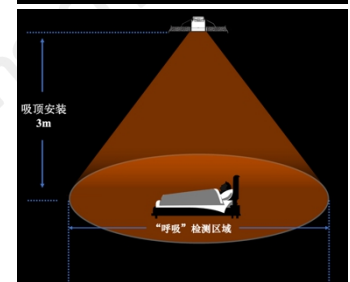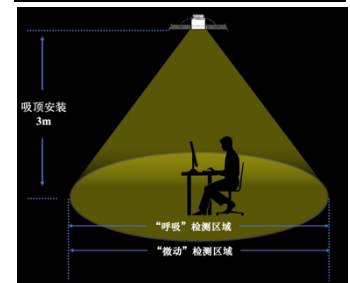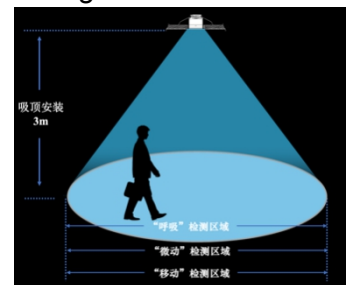

【Typical Application】

The product is mainly used in home, office, public places and other scenes. The following is an explanation of the application mode for typical scenes.

● Smart Home

In today's era, smart home is in the ascendant. It is a major topics of smart home that carrying out system management based on the human-existing in the home place makes all home units, such as lighting, home appliances, electric control, temperature control, fresh air and other systems runs intelligently with human center. Merrytek MSA201 Z detects human moving signals by 24GHz millimeter wave. Using TUYA wired communication to issue commands, it can cooperate with various systems of the home to achieve the ultimate home experience where people go, the light moves with it, and the temperature is comfortable.

Scenes: kitchen, cloakroom, living room and bathroom



● Smart Office

In view of the increasing demand for energy consumption in office spaces, more and more users are looking for humanized automatic dimming and switching of lamps in offices, conference rooms, bathrooms and other scenes. Humanized automatic air conditioning and air volume adjustment are used to take into account the needs of healthy office and energy saving and emission reduction. This product can accurately output human-existing/no-human signals to match with sensors such as temperature, humidity, and illumination, which perfectly meets the user's human-oriented intelligent application in the office.



Scenes: office lighting, office curtain, office air conditioning and other intelligent devices

● Smart Hotel

For the intelligent upgrading and transformation of hotels, humanized energy saving and personalized scene linkage have gradually become a hot spot. The product accurately output human-existing/no-human signal. It can be used with the hotel's ZigBee communication system for card-free power extraction, scene interaction and other applications. It can effectively meet the needs of the hotel based on human-existing for intelligent electricity, intelligent fresh air and intelligent bathroom.



Scenes: card-free power extraction, scene interaction, Smart bathroom, hotel electrical energy saving, human-existing/no-human monitoring

【Detection Signal】

The product detects human moving, minor moving, and presence signals, and realizes the detection of human-existing/no-human in non-sleep state. The following is a description of the moving, minor moving and presence signals:

- **Moving signal:** detect the human significant moving (walking) in the detection area.
- **Minor moving signal:** detect the human slight moving in the detection area, such as leaning forward, leaning forwarder and back, swinging limbs, shaking head, typing, playing with mobile phones and so on.
- **Presence signal:** detect human abdominal and thoracic expansion behaviors caused by breathing, but not detect moving signal and minor moving signal.

【Application Notice】

1. Product should be installed by a professional electrician.
2. Product should be kept as far away as possible from large-area metal plates, glass and other substances with high medium density to avoid false triggering.
3. The antenna surface of the product and its nearby circuits should avoid the flow of large currents, so as not to affect the normal operation of the product.
4. When installing multiple products in one place, please try to ensure that the antenna surfaces of the products are parallel to each other and do not face each other. The installation distance between products should be greater than 1m. Dense installation may cause false reports.
5. The antenna surface of the product should avoid facing the AC drive power supply, and stay away from the rectifier bridge, transformer, switch tube and other high-power devices of the drive power supply, so as to avoid power frequency signals from interfering with the microwave module.

6. Avoid using objects that vibrate for a long time around the product, such as shaking head fans and so on. The vibration signal will be regarded as a moving signal to trigger the product.

7. Avoid unnecessary lights illuminating the product's illuminance sensor detection window and interfere with the measurement of ambient light.

8. The microwave sensor has an ability to penetrate the building wall, and the microwave that penetrates outside the wall may cause false triggering when it detects moving objects. In order to avoid false triggering, when installing, please choose appropriate detection area, for example:

A. When product is used in the room whose length and width is about 2m or less, detection area should be set to 25%(application scenes: washroom, sitting room);

B. When product is used in the room whose length and width is about 3m, detection area should be set to 50%(application scenes: washroom, hallway, sitting room);

C. When product is used in the room whose length and width is about 4m, detection area should be set to 75%(application scenes: small office, meeting room, library);


D. When product is used in the room whose length and width is about 5m or more, detection area should be set to 100%(application scenes: large office, meeting room, library).

Note: The setting detection area depends on the actual environment(detection area parameters above application scenes are for reference only).

9. The detection distance is related to the moving speed of the moving object, the size of the moving object, the installation height, the installation angle, whether the installation environment is empty, the material of the reflector and other factors. The detection distances given in the specification are typical values, which are obtained by testers at height of 165cm and weight of 65kg and tested in an indoor open environment.

10. Product specifications and parameters may be optimized without prior notice.

【Remote control】

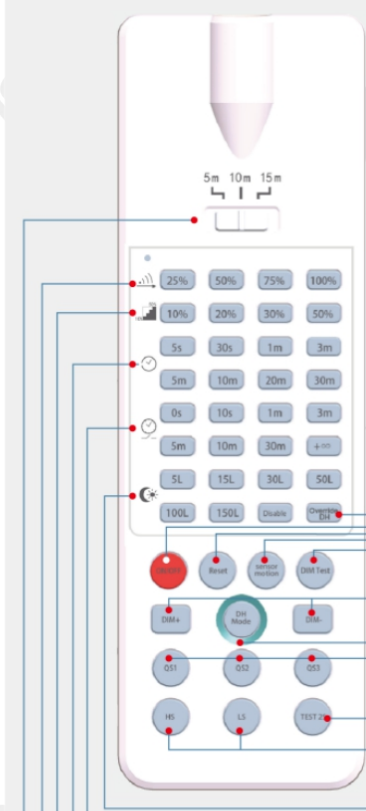Remote Control Setting	Button	Remarks
		Press "ON/OFF", the sensor executes "Presence" order and remain this state. Sensor function will be override. Press "RESET" or "Sensor motion" key to enter the sensing function. "ON/OFF" key has memory function after power off. The sensor remain the "Presence" state when power on again.
	Reset	Press "RESET", sensor parameters return to factory setting. Detection Area: 100% Hold time: 1min Indicator light: open
	Sensor motion	Press "Sensor motion", return to sensor mode (previous parameters setting is valid)
	DIM Test	N/A
	Override DH	N/A
	DIM + DIM -	N/A
	DH Mode	N/A
	Q1 Q2 Q3	Scene selection: QS1: Office QS2: Bedroom QS3: Washroom
	TEST 25	N/A
	HS LS	HS: Turn ON indicator light LS: Turn OFF indicator light
		N/A
		N/A
		Hold time Set up hold time: 5S/30S/1min/3min/5min/10min/20min/30min
		N/A
		Detection Area Set up detection area: 25%/50%/75%/100%
		Remote Distance Toggle bottom can set the remote distance of remote control and sensor.

【Disclaimer】

Due to the complexity of product technology and differences in application environment, it is difficult to guarantee a completely accurate or complete description, so this specification is only for user reference.

We will reserve the right to make changes to the product specifications without notifying the user, and do not make any commitments and guarantees in the legal sense.

At the same time, our company encourages users to supplement or modify the contents of our specifications after using our products.

Versions	Release/ change Date	Publishing
V1.0	2022.09.05	Jacky
V1.1	2022.11.04	Jacky