


LED line LITE


Code: 209947

EAN: 5905378209947

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1120lm round IP20 White LITE**

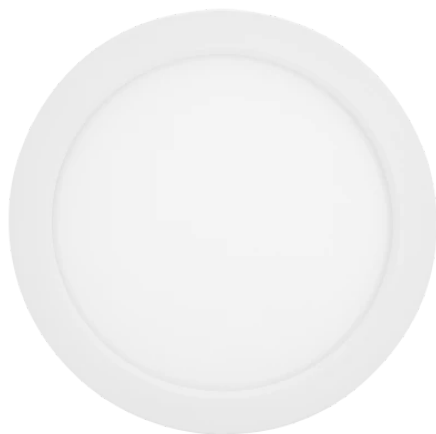

Downlight EASY FLEX 9-12-15W CCT 1120lm is a modern round LED line LITE lighting product. Its high light efficiency is 1120 lumens at power expenditure 9, 12 or 15 W, which provides excellent lighting conditions. Thanks to the possibility to choose the temperature of the colour of light (3000 K, 4000 K, 5000 K) and the universal assembly (mountain, surface and suspended), DOWNLIGHT fits perfectly into various interior arrangements.



Technical data

| Parameter | Value |
|---------------------------------------|--|
| Energy efficiency class 2019/2015 | E |
| Warranty | 3 |
| Power | <ul style="list-style-type: none"> • 9 W • 12 W • 15 W |
| Voltage | <ul style="list-style-type: none"> • 220-240 V AC |
| Correlated colour temperature | <ul style="list-style-type: none"> • 3000 K • 4000 K • 5000 K |
| Colour of the light | CCT |
| Colour rendering index Ra | 80 |
| IP protection rating | IP20 |
| IK protection rating | 05 |
| IEC protection class | II |
| Luminous efficacy | 75 |
| Luminous flux | 1120 |
| The lumen maintenance factor | 96 |
| Lifetime L70B50 | 30 000 h |
| Survival factor | 0.9 |
| Colour consistency in McAdam ellipses | ≤6 |

| Parameter | Value |
|--|--|
| Frequency of the supply voltage | 50/60Hz |
| Beam angle | 120 |
| LED type | SMD2835 |
| LED quantity | 84 |
| Power Factor | 0,8 |
| Number of on/off cycles | 15000 |
| Lamp's warm-up time to 60% | 1 |
| Ambient temperature suitable for operation | -20 ÷ 40 |
| Installation method | 3in1 surface mounted, flush mounted, suspended |
| Mounting hole diameter | 65-130 |
| Height | 17 mm |
| Fixture's diameter | 170 mm |
| Diameter | 170 mm |
| Weight | 0,24 kg |
| Colour | White |


LED line LITE

Code: 209947


EAN: 5905378209947

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1120lm round IP20 White LITE**

Technical drawing




Light distribution

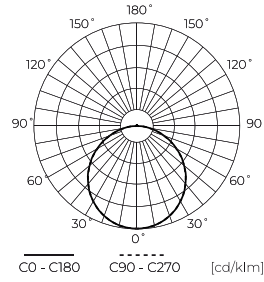

Additional product photos



Logistics data



Single packaging

| | |
|--------|----------|
| Width | 31 mm |
| Height | 175 mm |
| Length | 175 mm |
| Weight | 0,215 kg |

Bulk packaging

| | |
|----------|----------|
| Quantity | 40 |
| Width | 365 mm |
| Height | 335 mm |
| Length | 370 mm |
| Weight | 13,08 kg |

Europallet

| | |
|---------------|-----|
| Bulk quantity | 960 |
|---------------|-----|

LED line LITE

Code: 209947

EAN: 5905378209947

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1120lm round IP20 White LITE**

Example application