

LED line LITE


Code: 209954

EAN: 5905378209954

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1050lm round IP20 black LITE**



The round downlight EASY FLEX 9-12-15W CCT with a power of 1050 lm is characterized by its versatility thanks to the choice of three colour temperatures: 3000 K, 4000 K and 5000 K, which allows to adjust lighting to different needs. It has an E energy class and a Ra colour reproduction factor of 80, which ensures good light quality.



Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	<ul style="list-style-type: none"> • 9 W • 12 W • 15 W
Voltage	<ul style="list-style-type: none"> • 220-240 V AC
Correlated colour temperature	<ul style="list-style-type: none"> • 3000 K • 4000 K • 5000 K
Colour of the light	CCT
Colour rendering index Ra	80
IP protection rating	IP20
IK protection rating	05
IEC protection class	II
Luminous efficacy	70
Luminous flux	1050
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	120
LED type	SMD2835
LED quantity	84
Power Factor	0,8
Number of on/off cycles	15000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
Installation method	3in1 surface mounted, flush mounted, suspended
Mounting hole diameter	65-130
Height	17 mm
Fixture's diameter	170 mm
Weight	0,27 kg
Colour	Black


LED line LITE

Code: 209954


EAN: 5905378209954

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1050lm round IP20 black LITE**

Technical drawing



Light distribution

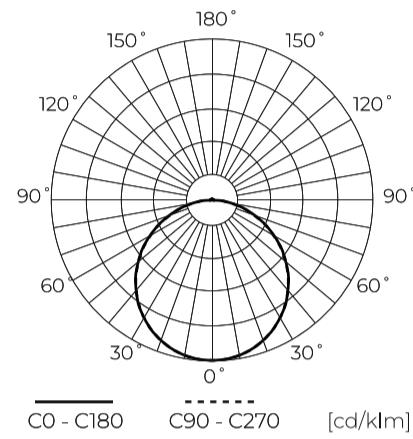

Additional product photos



Logistics data



Single packaging

Width	31 mm
Height	175 mm
Length	175 mm
Weight	0,29 kg

Bulk packaging

Quantity	40
Width	365 mm
Height	335 mm
Length	370 mm
Weight	13,08 kg

Europallet

Quantity	1200
Height	1,9 m
Bulk quantity	30
Weight	430 kg

LED line LITE

Code: 209954

EAN: 5905378209954

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
9/12/15W 1050lm round IP20 black LITE**

Example application