**LED line**

LED line LITE | Code: 209978 | EAN: 5905378209978

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K) 18W 1530lm round IP20 White LITE motion sensor

Downlight EASY FLEX 18W CCT is a modern lighting setting, characterized by an elegant round shape and white finish. It emits a total luminous flux of 1530 lm at 85 lm/W. Thanks to the function of changing the temperature of light (3000 K, 4000 K, 5000 K) it provides flexibility to adjust the atmosphere to the needs of the user.

| 3 WARRANTY | IP 20 | IK 05 | PF 0,9 | 220–240V AC | | MAX –20÷40°C |

CE

Technical data

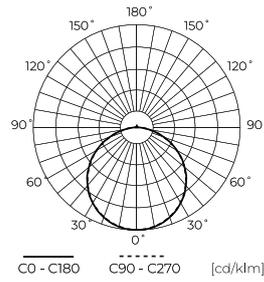| Parameter	Value		Parameter	Value
Energy efficiency class 2019/2015	E		Hold time	60 s.
Warranty	3		Frequency of the supply voltage	50/60Hz
Power	• 18 W		Beam angle	120
Voltage	• 220-240 V AC		Sensor type	Microwave
			LED type	SMD2835
Correlated colour temperature	• 3000 K		LED quantity	86
	• 4000 K		Power Factor	>=0,9
	• 5000 K		Number of on/off cycles	15000
Colour of the light	CCT		Lamp's warm-up time to 60%	1
Colour rendering index Ra	80		Ambient temperature suitable for operation	`-20 ÷ 40
IP protection rating	IP20		Installation method	3in1 surface mounted, flush mounted, suspended
IK protection rating	05			
IEC protection class	II		Mounting hole diameter	65-185
Luminous efficacy	85		Height	17 mm
Luminous flux	1530		Fixture's diameter	225 mm
The lumen maintenance factor	96		Weight	0,45 kg
Lifetime L70B50	30 000 h		Colour	White
Survival factor	0.9			
Colour consistency in McAdam ellipses	≤6			

LED line LITE   Code: 209978   EAN: 5905378209978

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K) 18W 1530lm round IP20 White LITE motion sensor

Technical drawing

ø225   17
ø65–185

Light distribution

180°
150°   150°
120°   120°
90°   90°
60°   60°
30°   30°
0°

C0 - C180   C90 - C270   [cd/klm]

Additional product photos

Logistics data

Single packaging

Width	31 mm
Height	230 mm
Length	230 mm
Weight	0,36 kg

Bulk packaging

Quantity	20
Width	335 mm
Height	255 mm
Length	480 mm
Weight	9,52 kg

Europallet

Quantity	540
Height	1,5 m
Bulk quantity	27
Weight	290 kg

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)
18W 1530lm round IP20 White LITE
motion sensor

Example application