LED line LITE

Code: 240621

EAN: 5901583240621

LED bulb GU10 2700K 5,5W 500lm 230V 60° DIM Glass LITE



LITE GU10 5,5W 2700K LED line bulb is an efficient source of warm-colour light that emits 500 lumens. Its colour temperature is 2700 K, which provides a cozy atmosphere. Powered by 220-240 V AC voltage and 50/60 Hz frequency, it has a high energy efficiency of 91 lm/W and a durability of up to 30,000 hours. Thanks to the TRIAC function, it is possible to dim it comfortably.

3 WARRANTY

IP 20

ON/OFF 50.000

Technical data

Parameter	Value
Energy efficiency class 2019/2015	G
Warranty	3
Power	• 5.5 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 2700 K
Colour of the light	White
Colour rendering index Ra	80
Luminous efficacy	91
Luminous flux	500 lm
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Dimmable function	Triac

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	60°
LED type	SMD2835
Compatible dimmer type	TRIAC
Power Factor	0,8
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	54
Fixture's diameter	50 mm
Material (housing)	Glass

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**


LED line LITE

Code: 240621


EAN: 5901583240621

LED bulb GU10 2700K 5,5W 500lm 230V 60° DIM Glass LITE

Technical drawing




Light distribution

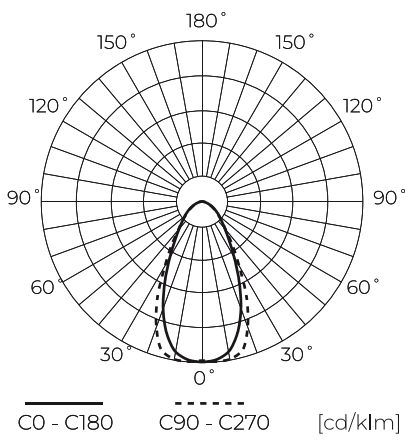


Additional product photos

Logistics data




Single packaging

Quantity	10
Width	50 mm
Height	50 mm
Length	60 mm
Weight	0,08 kg



Bulk packaging

Quantity	100
Width	280 mm
Height	165 mm
Length	540 mm
Volume	0,024 m3
Weight	7,6 kg
Comments	



Europallet

Quantity	4400
Height	1,90 m
Quantity in layer	1600
Number of layers	3
Bulk quantity	100
Weight	390 kg

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line LITE

Code: 240621

EAN: 5901583240621

LED bulb GU10 2700K 5,5W 500lm 230V 60° DIM Glass LITE

Example application

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**