

LED line LITE

Code: 240638

EAN: 5901583240638

LED bulb GU10 4000K 5,5W 550lm 230V
60° DIM Glass LITE



LED line bulb LITE GU10 power 5.5 This modern lighting solution offers a light stream of 550 lumens and a neutral colour of 4,000 K light. Thanks to its 60° angle and a high 96% luminous flux retention rate, it provides uniform lighting throughout the lifetime, estimated at as much as 30,000 hours.

3
WARRANTY

IP
20

ON/OFF
50,000

CE

Technical data

Parameter	Value
Energy efficiency class 2019/2015	F
Warranty	3
Power	• 5.5 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
Luminous efficacy	100
Luminous flux	550 lm
The lumen maintenance factor	96
Lifetime L70B50	30 000 h
Survival factor	0.9
Dimmable function	Triac

Parameter	Value
Colour consistency in McAdam ellipses	≤6
Frequency of the supply voltage	50/60Hz
Beam angle	60°
LED type	SMD2835
Compatible dimmer type	TRIAC
Power Factor	0,8
Number of on/off cycles	50000
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-20÷40
For indoor use	Inside
Height	54
Fixture's diameter	50 mm
Material (housing)	Glass

LED line LITE


Code: 240638

EAN: 5901583240638


LED bulb GU10 4000K 5,5W 550lm 230V

60° DIM Glass LITE

Technical drawing






Light distribution

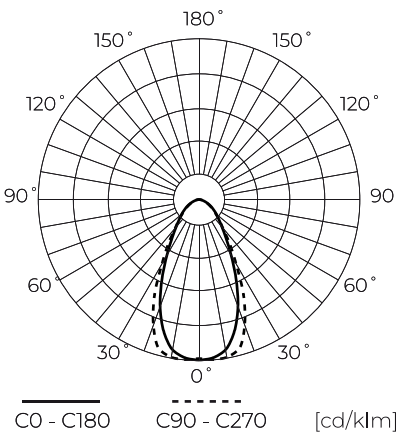

Additional product photos

Logistics data



Single packaging

Quantity	10
Width	50 mm
Height	50 mm
Length	60 mm
Weight	0,06 kg

Bulk packaging

Quantity	100
Width	280 mm
Height	165 mm
Length	540 mm
Volume	0,024 m3
Weight	7,6 kg
Comments	

Europallet

Quantity	4000
Height	1815 mm
Quantity in layer	400
Number of layers	11
Bulk quantity	4400
Weight	308 kg

LED line LITE

Code: 240638

EAN: 5901583240638

LED bulb GU10 4000K 5,5W 550lm 230V
60° DIM Glass LITE

Example application