


LED line




DOWNLIGHT

EASY FLEX

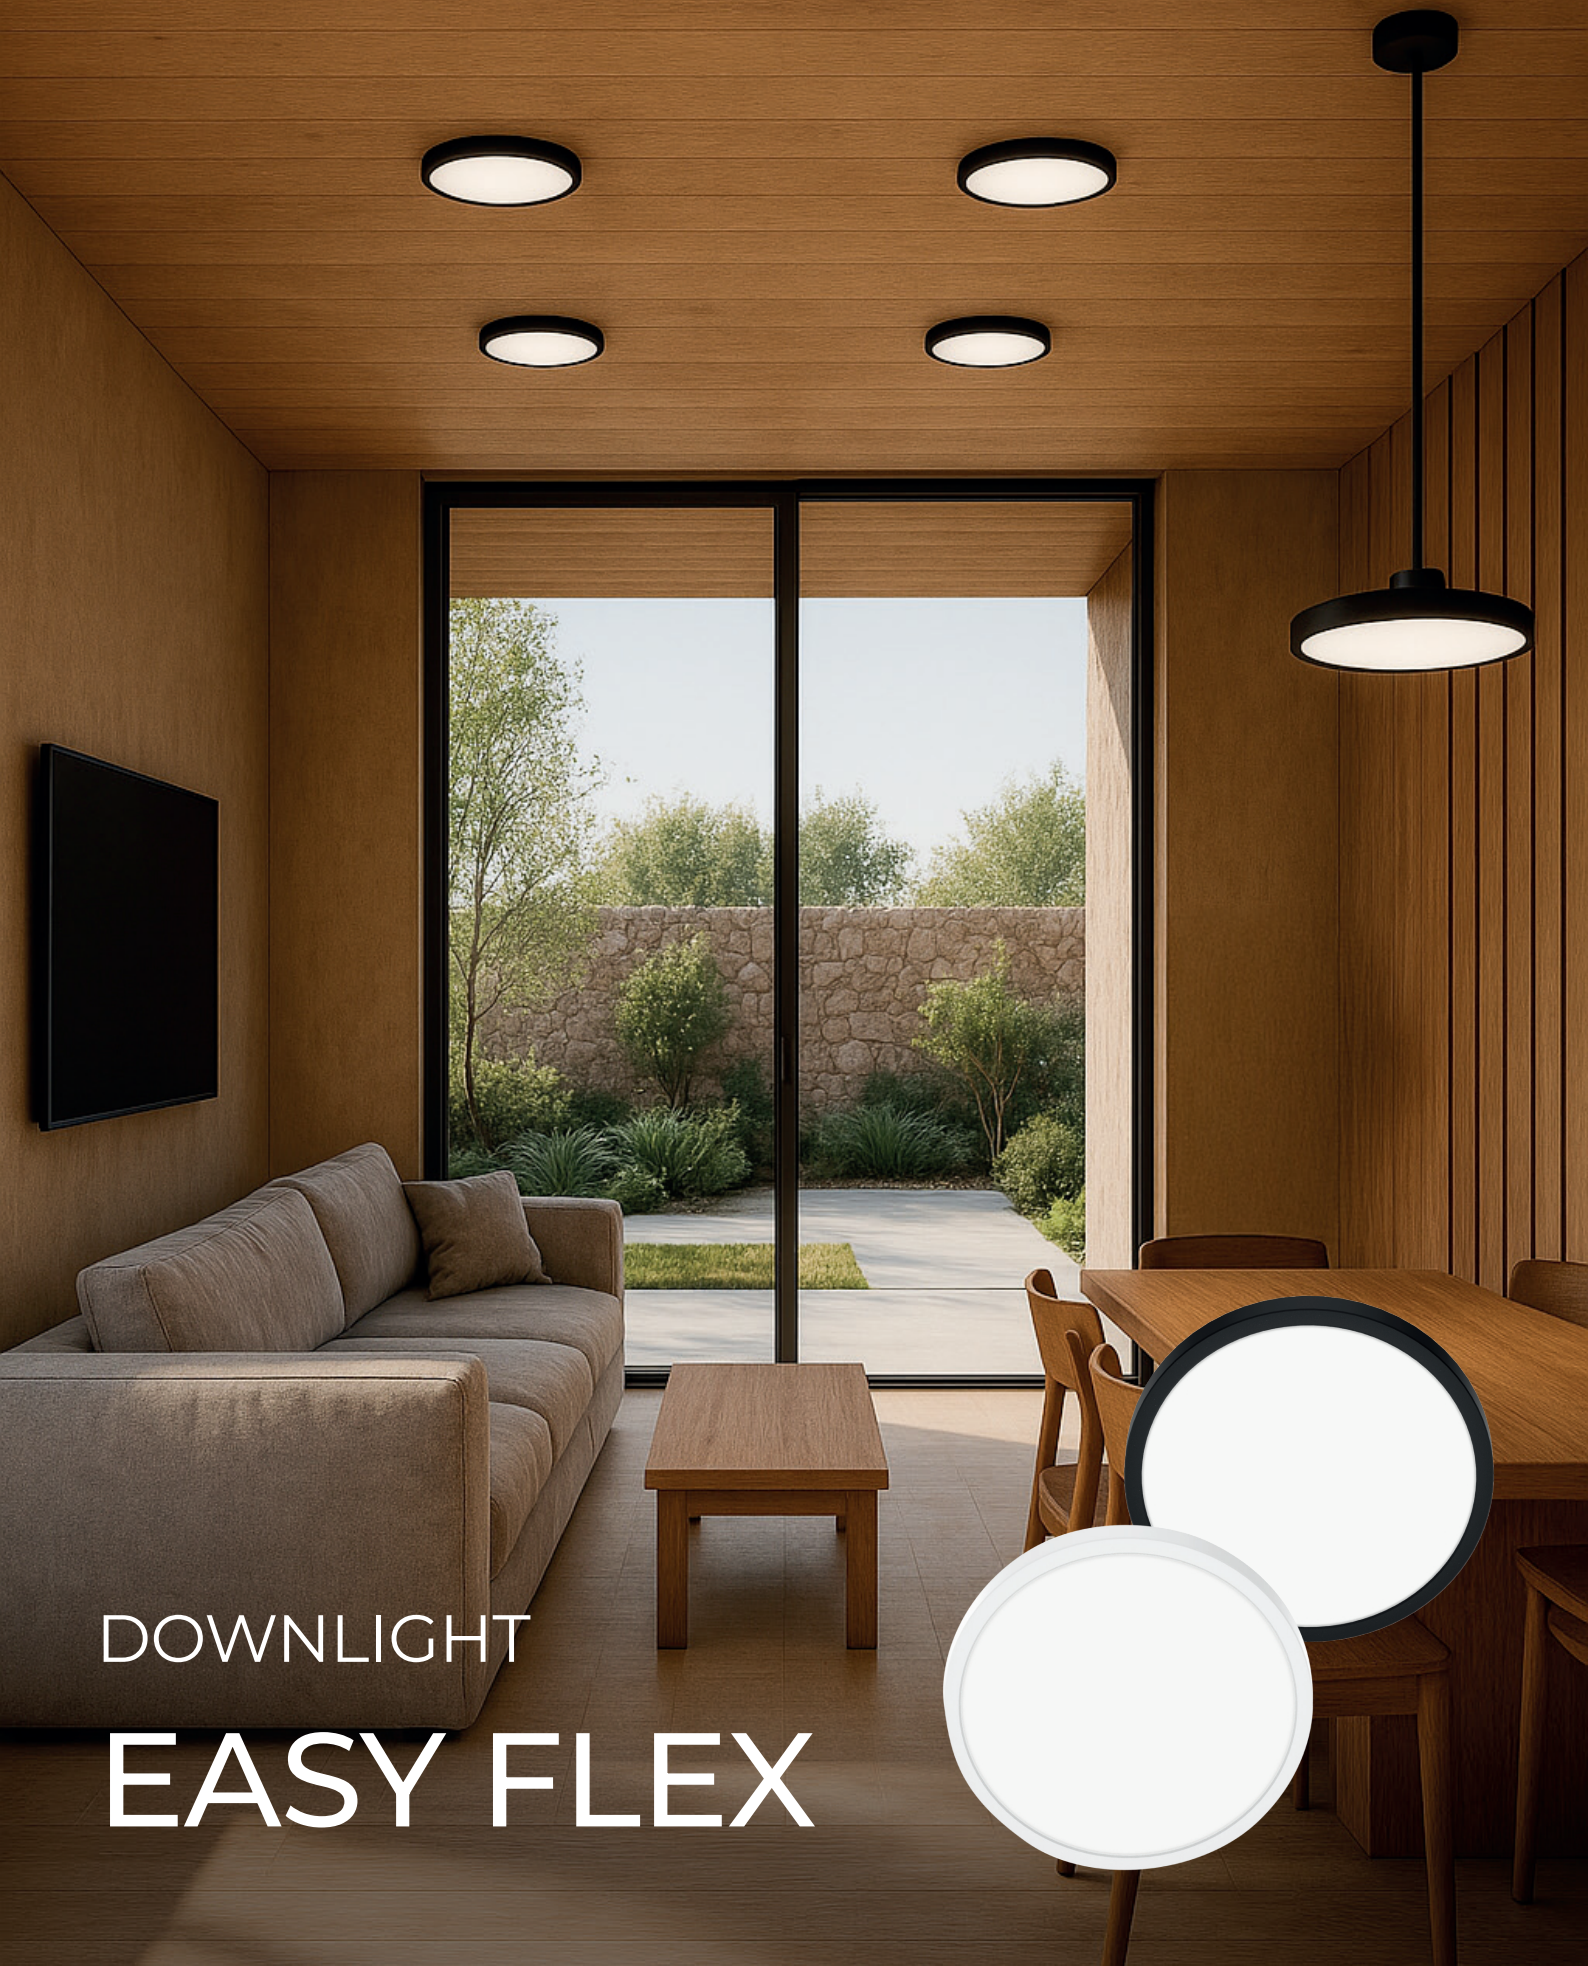

wide range of
power 6-70W

DOWNLIGHT EASY FLEX

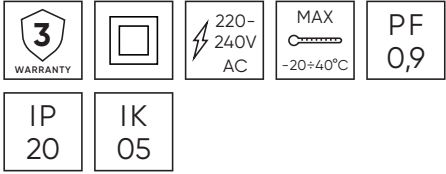

EFFICACY 80-90 lm/w

Power [W]:
6-70

Luminous flux [lm]:
450-6300

Beam angle [°]:
120

Colour temperature [K]:

3000 4000 5000



Lifetime [h]:
L70B50 - 30.000

Housing:



Light distributions


Downlight features a wide 120° beam angle, providing uniform illumination with minimal shadowing. Ideal for open spaces and general lighting applications.

Application of EASY FLEX – modern interiors, apartments, commercial buildings, corridors and communication zones, quick modernization of lighting installation.





Luminous flux [lm]
450-6300

Beam angle:
120°

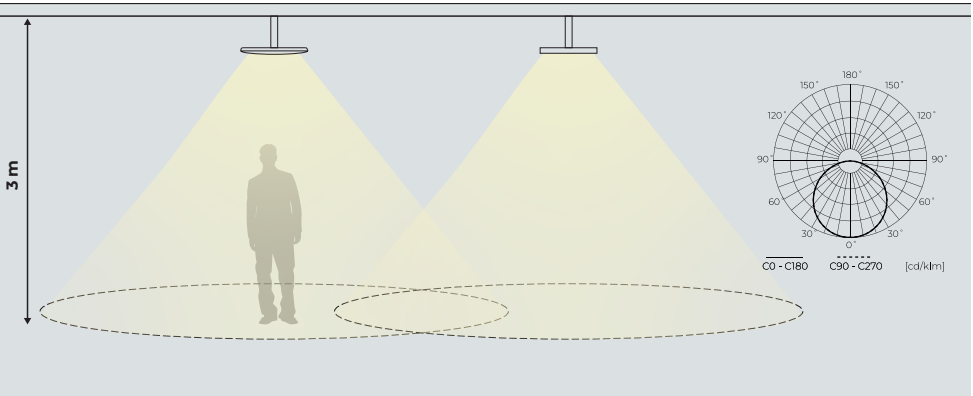



Adjustable colour temperature

The downlights, thanks to the CCT function, allow you to adjust the colour of light from 3000/4000/5000K. In addition, you benefit from the highest quality of light, thanks to the high colour rendering index Ra>85, which allows you to faithfully exhibit the colour of any space.

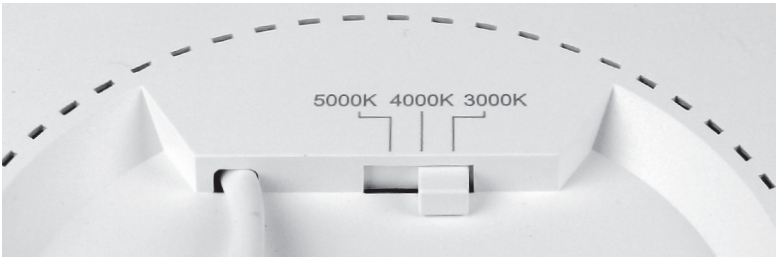


Mounting to various openings

The adjustable mounting rail allows the downlight to fit seamlessly into ceiling cutouts of various sizes, making installation faster, easier, and more flexible.

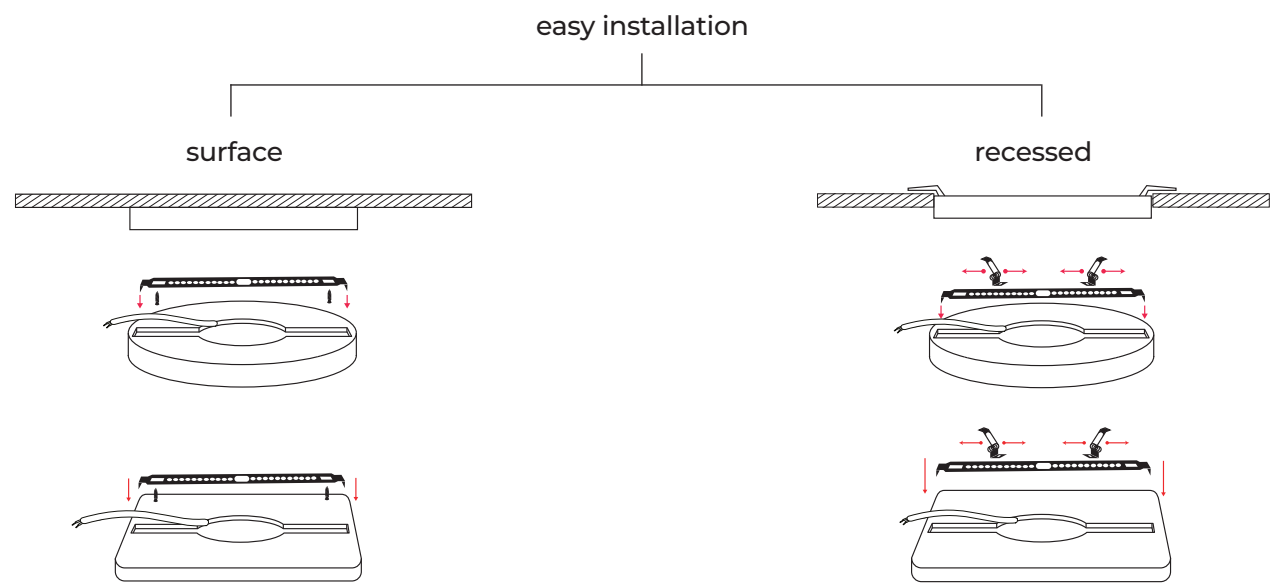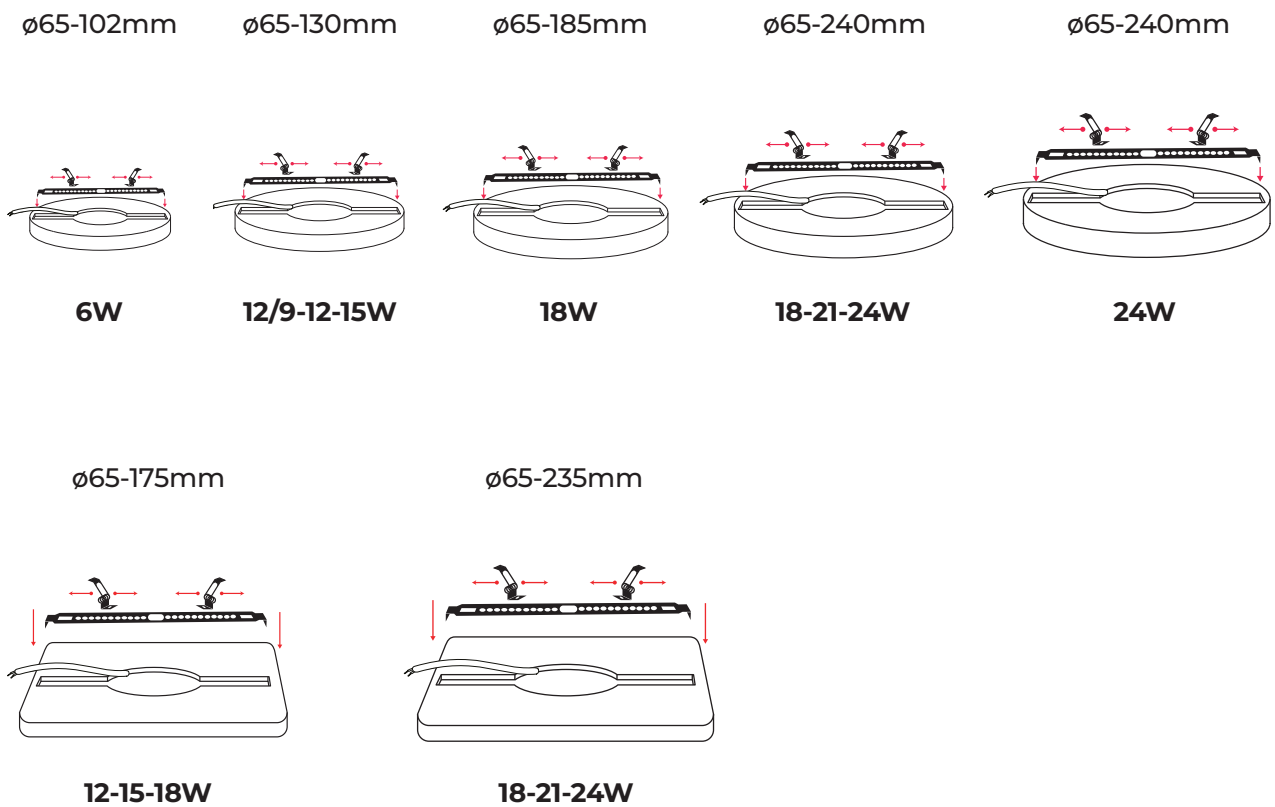


Downlight EASY FLEX round


SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	MOTION SENSOR	EEI
209923	New	6	120	4000	450		A t G E
209930	New	12	120	4000	900		A t G E
209947	New	9-12-15	120	4000	1120		A t G E
209961	New	9-12-15	120	4000	1050		A t G E
209961	New	18	120	4000	1530		A t G E
209978	New	18	120	4000	1530	●	A t G E
210004	New	18-21-24	120	3000-4000-5000	2110		A t G E
210011	New	18-21-24	120	3000-4000-5000	2000		A t G E
209985	New	24	120	4000	2110		A t G E
209992	New	24	120	4000	2110	●	
210028	New	45	120	3000-4000-5000	4050		A t G E
210035	New	70	120	3000-4000-5000	6300		A t G E

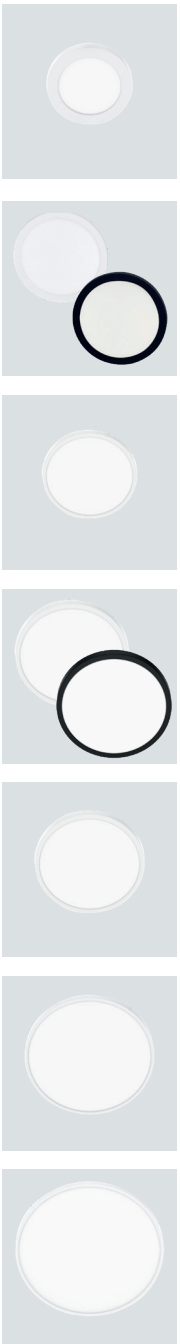


DIMENSIONS [mm]

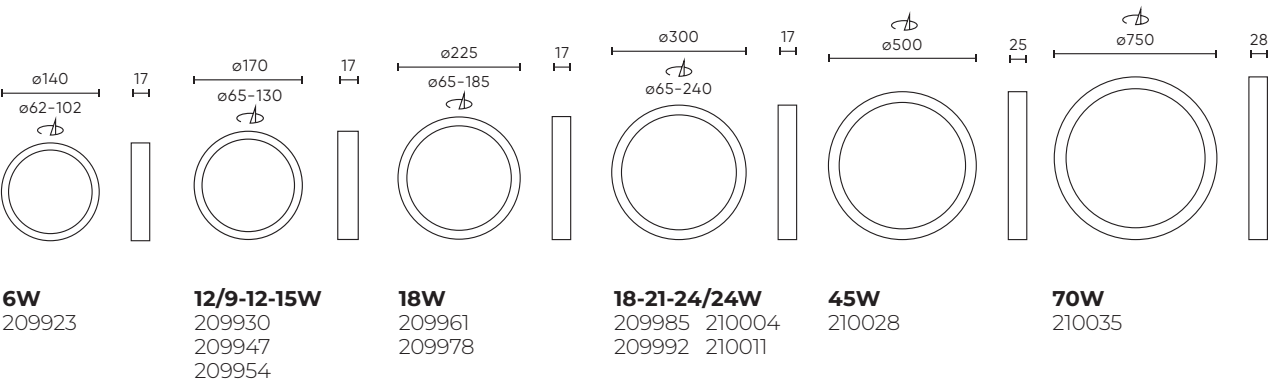


Downlight EASY FLEX square




SYMBOL		POWER [W]	BEAM ANGLE [°]	COLOUR TEMPERATURE [K]	LUMINOUS FLUX [lm]	EEI
210103	New	12-15-18	120	3000-4000-5000	1530	A 1 G E



210110	New	12-15-18	120	3000-4000-5000	1440	A 1 G E
--------	-----	----------	-----	----------------	------	---------------




210127	New	18-21-24	120	3000-4000-5000	2110	A 1 G E
--------	-----	----------	-----	----------------	------	---------------




210134	New	18-21-24	120	3000-4000-5000	2000	A 1 G E
--------	-----	----------	-----	----------------	------	---------------

DIMENSIONS [mm]

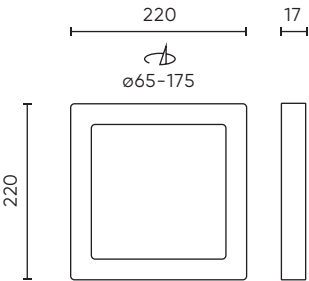


12-15-18W
210103
210110



18-21-24W
210127
210134

Downlight EASY FLEX ceiling bracket



SYMBOL		LENGTH [cm]	COLOR
210042	New	20-50	○
210059	New	50-100	○



210066	New	20-50	●
210073	New	50-100	●

Downlight EASY FLEX suspension kit



212237	New	120	○
--------	-----	-----	---





LED line

LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu



/LEDIN Group Sp. z o.o.



/LED line



/LED line