


LED line


CUBE G9



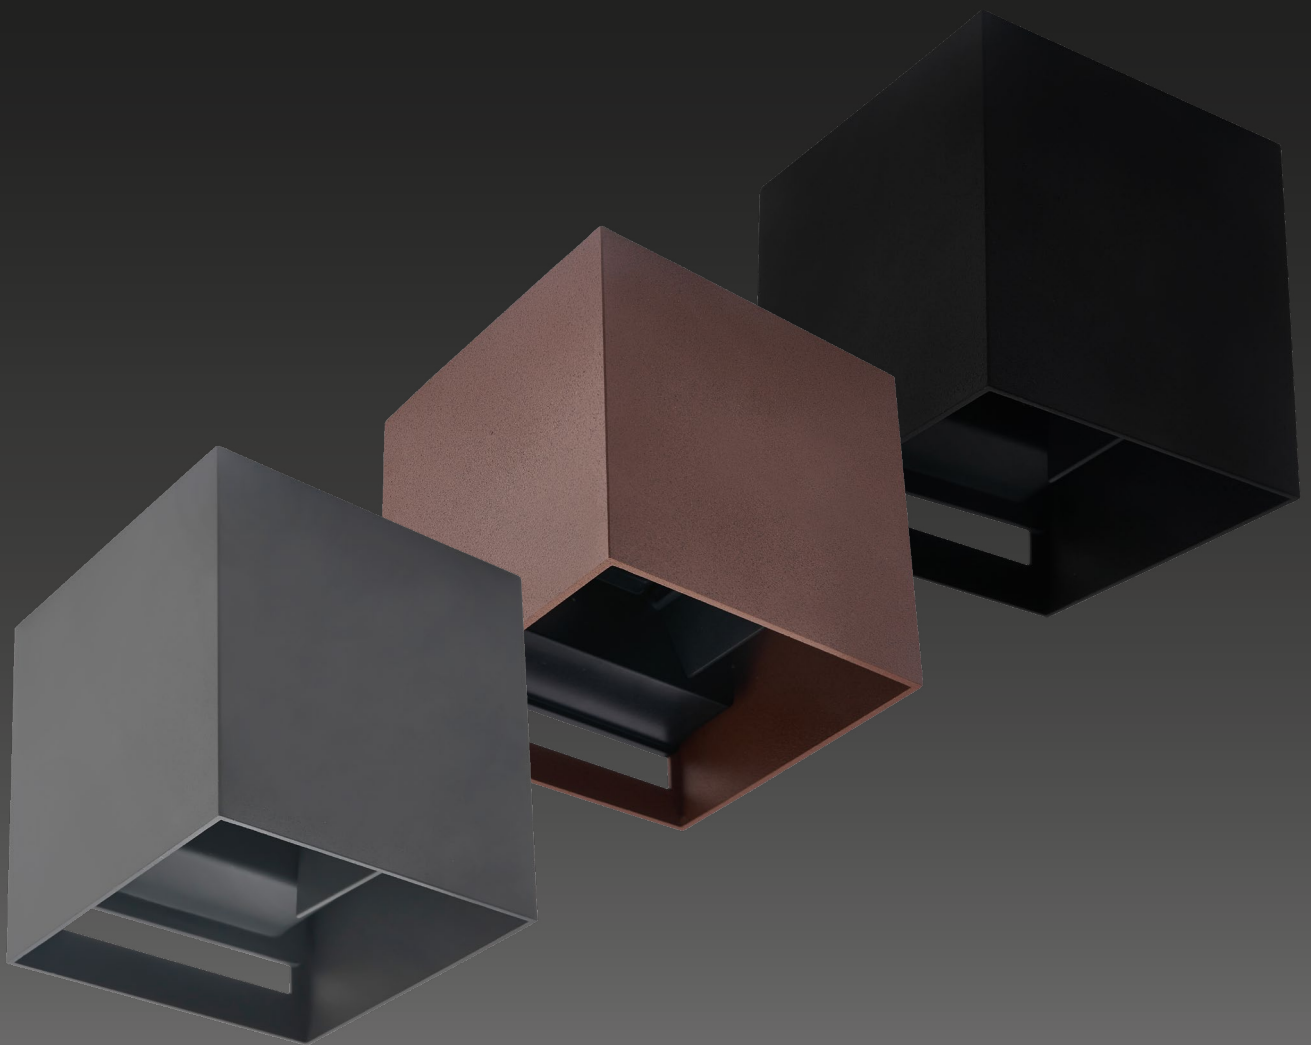

WALL AND BOLLARD LUMINAIRES

CUBE G9



Key features:

- ▶ Replaceable light source – selectable light colour and luminaire wattage
- ▶ IP65 protection for outdoor use
- ▶ Adjustable installation with up/down light distribution control
- ▶ Modern, aesthetic and durable aluminium housing
- ▶ Available in three colour variants

Max. lamp power:
6W

Compatible lamp base:
G9

Socket type:
G9

Housing:
aluminium

Available colours:



Applications:

- ▶ Exterior façade lighting
- ▶ Corridor and decorative lighting



Discover the all-new CUBE G9

The new LED line CUBE G9 luminaire is an updated version of the popular Cube model, designed for convenient use and easy adaptation to various architectural settings. This version features a G9 lamp base, allowing for quick replacement of the light source and easy adjustment of the light colour to individual user preferences. The IP65-rated housing ensures resistance to moisture, dust and weather conditions, making the luminaire suitable for both indoor and outdoor applications.

An additional advantage is the ability to adjust the direction of light emission – upwards or downwards – enabling the creation of striking lighting effects on façades and walls. The solid construction combined with a minimalist design allows the CUBE G9 to blend seamlessly into modern spaces. The replaceable light source simplifies maintenance and reduces operating costs. The luminaire is available in three colour options – black, grey and corten, allowing it to match a wide range of architectural styles. CUBE G9 combines simplicity of form with functionality, delivering aesthetic and reliable lighting for years to come.




Adjustable light direction

CUBE G9 wall luminaires are equipped with an adjustable shielding system, allowing manual adjustment of the light distribution angle from 0° to 120°. Designed for both upward and downward lighting, they offer virtually unlimited possibilities for creating striking decorative lighting effects on building façades and in outdoor spaces. Full control over light distribution enables the creation of the perfect atmosphere for any architectural environment.


Upwards and downwards



Downwards only

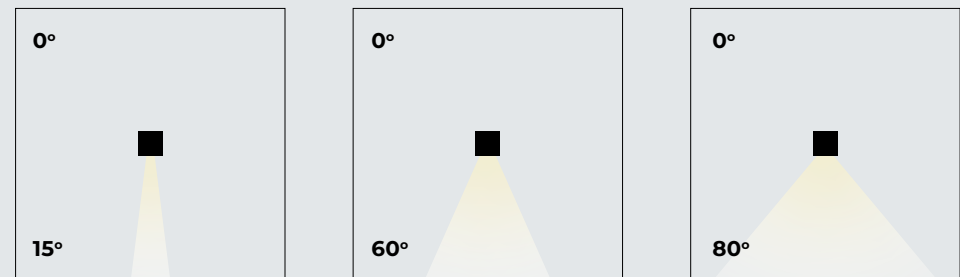

Upwards only

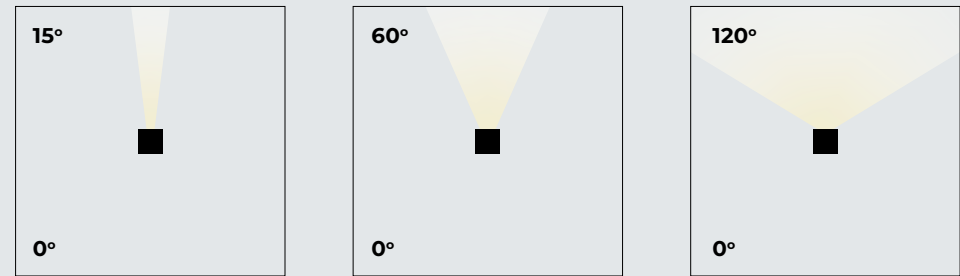

Technical parameters



MAX. [W]	beam	symbol
G9		●
6	0 ÷ 120	221055



MAX. [W]	beam	symbol
G9		●
6	0 ÷ 120	221079



MAX. [W]	beam	symbol
G9		●
6	0 ÷ 120	221062

Accessories



G9 Light Sources

Check the offer
www.ledline.eu



LED line

WE CO-CREATE




LEDIN Group Sp. z o.o.
Dębowa 1
07-410 Tobolice
Poland

export@ledline.pl
ledline.eu

 /LEDIN Group Sp. z o.o.

 /LED line

 /LED line