

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** LED line LITE

**Supplier's address:** LEDIN Group Sp. z o.o., Dębowa 1, 07-410 Rzekuń Tobolice Mazowieckie, PL

**Model identifier:** 248 689

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux ( $\Phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{\text{on}}$ ), expressed in W	5,0	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lig-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		


hting control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,381 0,381	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	11	Survival factor	0,90	
the lumen maintenance factor	0,96			
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	..(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) : not applicable;

(b) : not applicable;

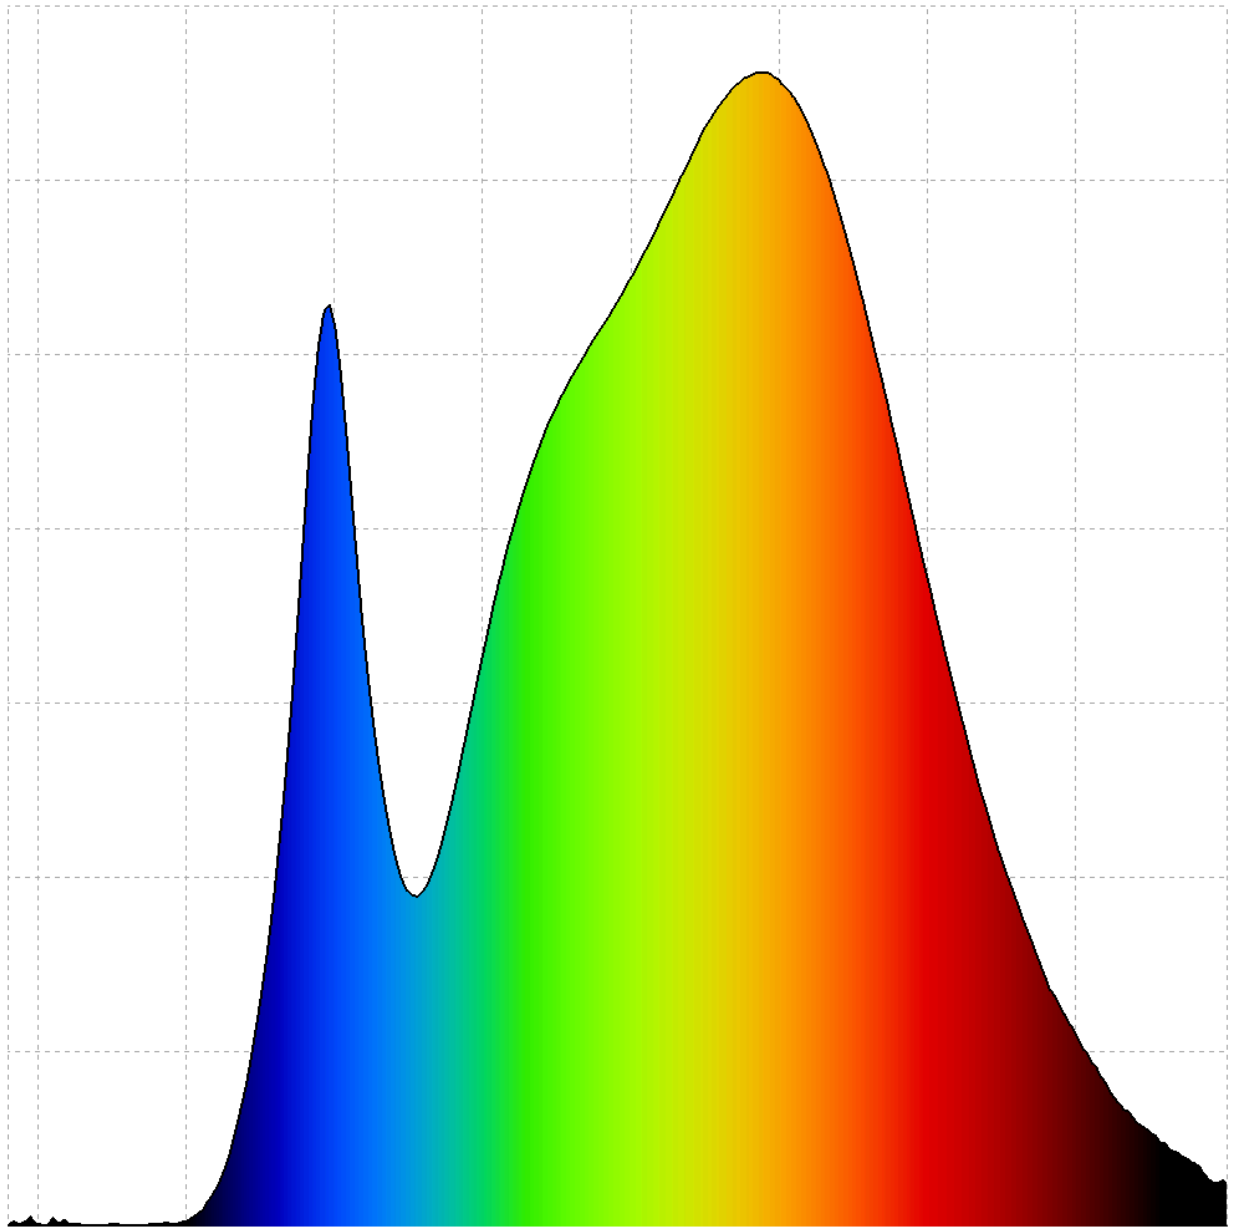

Múnla a cuireadh ar mhargadh an Aontais ón méid seo a leanas 01/01/2015



**Cláruimhir EPREL:** 1995731

<https://eprel.ec.europa.eu/qr/1995731>

**Soláthróir:** LEDIN GROUP SPÓŁKA Z OGRANICZONĄ ODP  
OWIEDZIALNOŚCIĄ (Monaróir)

**Suíomh gréasáin:** [www.ledin.pl](http://www.ledin.pl)

**Seirbhís cúraim custaiméirí:**

**Ainm:** LEDIN Group Sp. z o.o.

**Suíomh gréasáin:** [www.ledin.pl](http://www.ledin.pl)

**Seoladh Ríomhphoist:** [kontakt@ledin.pl](mailto:kontakt@ledin.pl)

**Guthán:** +48297647700

**Seoladh:**

Dębowa 1  
07-410 Tobolice  
Poland