





SPECIFICATION

Product Name: Daylight Sensor

Model No.: MS10

Issue Date: November 23, 2018

CUSTOMER APPROVED

PRODUCT DIRECTOR APPROVED	SALES CHECKED	R&D CHECKED	PREPARED
			

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: www.merrytek.com

1. Features



MS10 A
Screw Mounting



MS10 B
Spring Mounting


- Adopts Merrytek patent Daylight harvesting technology
- High applicability ,Keep a constant light in spite of background color
- Precise setting of target light via BCD coding switch, convenient for setting
- 5 years warranty

2. Parameter


Input	Operating Voltage Range	1-10V DC
	Rated Voltage	1-10V DC
Sensor Parameters	Detection Range	3-4m
	Daylight Sensor	100-2000Lux
Dim Interface	1-10V dimming	<50 mA
	Dimming mode	Lead connection: red is the positive pole of port 1-10v; black is the negative pole of port 1-10v
Operating Environment	Operating Temperature	0℃...+55℃
	Storage Temperature	-35℃...+80℃
Certificate Standards	Environmental Requirement	Compliant with RoHS
	Certificate	CE
	IP Rating	IP20
	Protection Class	Class 2
	Installation	Built-in installation
	Dimension	90*130 mm
	Package	White bag+Clapboard + Carton(K=A)
	Net Weight	A:26.7g B:29.8g
	Lifetime	5 years warranty @Ta 230V full load

3. Function


Constant light functions

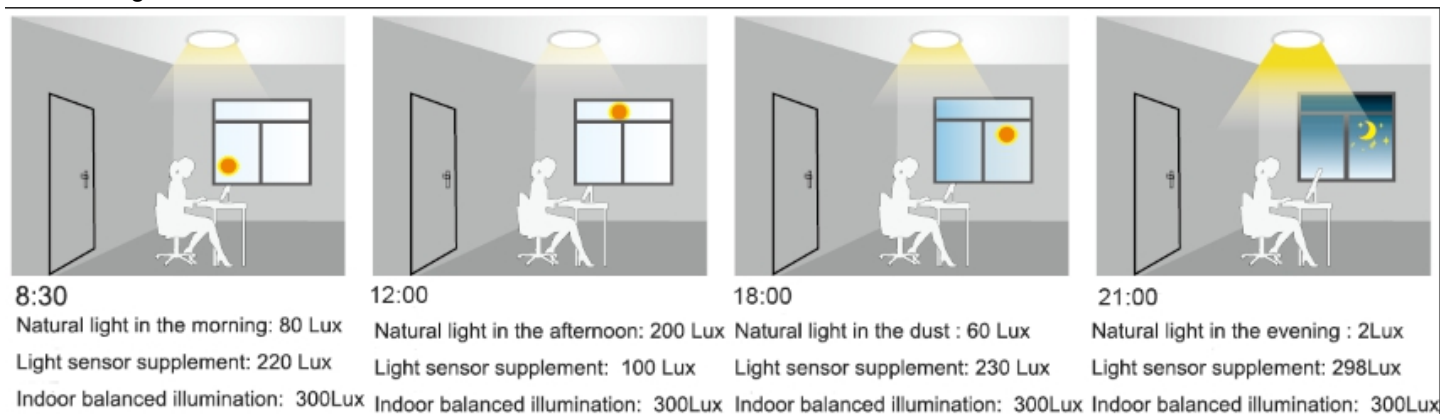

4. Dimension (mm)

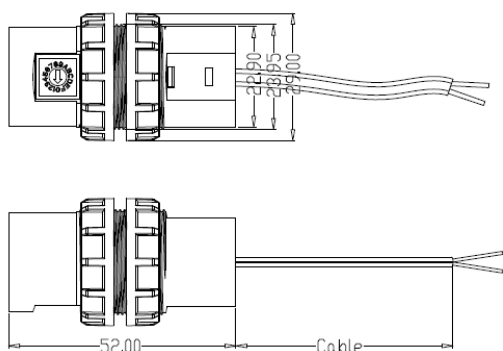


MS10 A

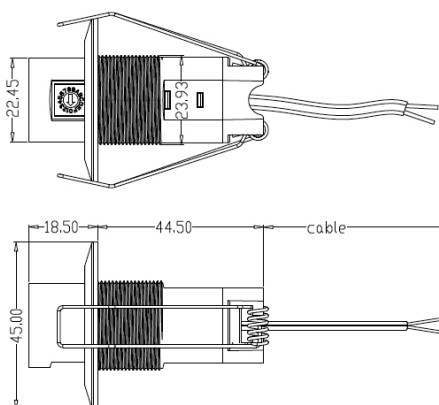


MS10 B

5. Wiring

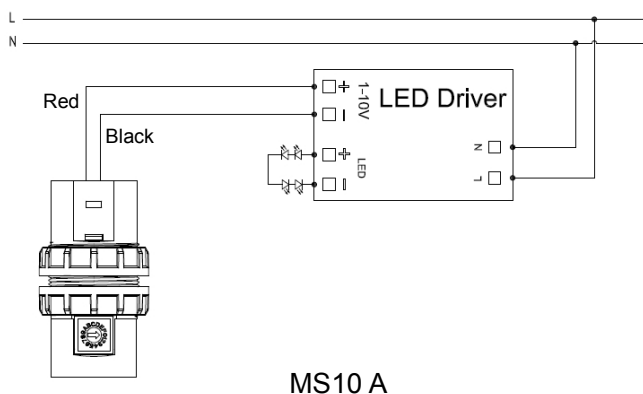


MS10 A

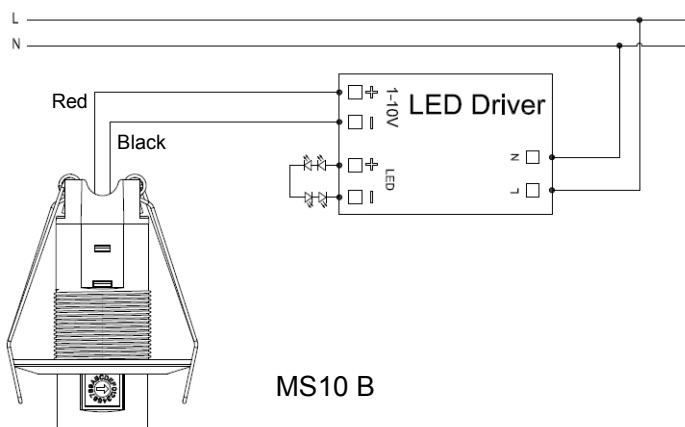


MS10 B

6. Structure

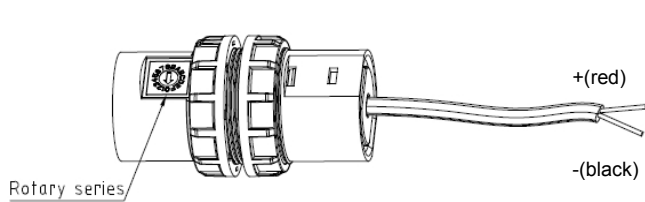


MS10 A

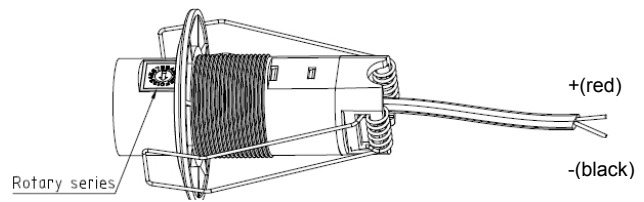



MS10 B

7. DIP Switch Setting

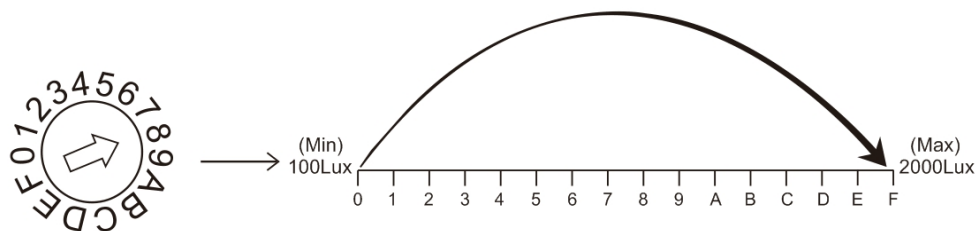

Lux curves of different gears of 0-F (refer to load of 30w) :

Level	Lux Value
0	100
1	190
2	220
3	250
4	280
5	300
6	500
7	530
8	600
9	680
A	750
B	800
C	
D	
E	
F	

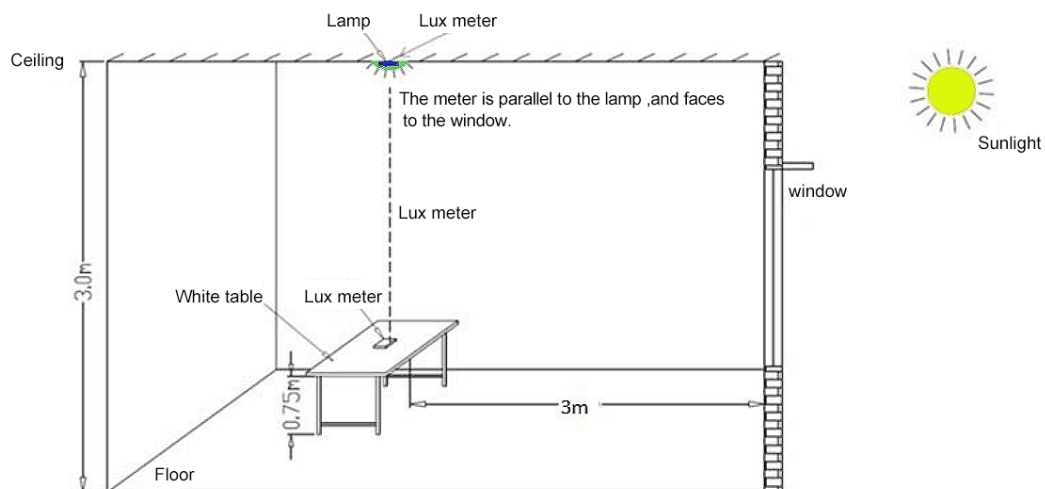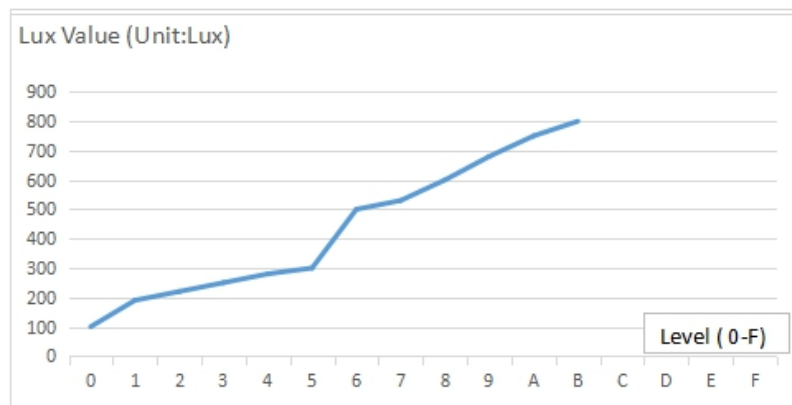

Shenzhen Merrytek Technology Co.,Ltd

Add: No.17th Building, Dianda Guyuan Industrial Park, Mashantou, Matian, Guangming District, Shenzhen, China, 518106

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: www.merrytek.com

8. Application Notice

- 1) To be equipped with active 1-10v dimming power supply for use!
- 2) Pay attention to the positive and negative terminals of the leads when wiring and installation.