LED line LITE   Code: 210011   EAN: 5905378210011
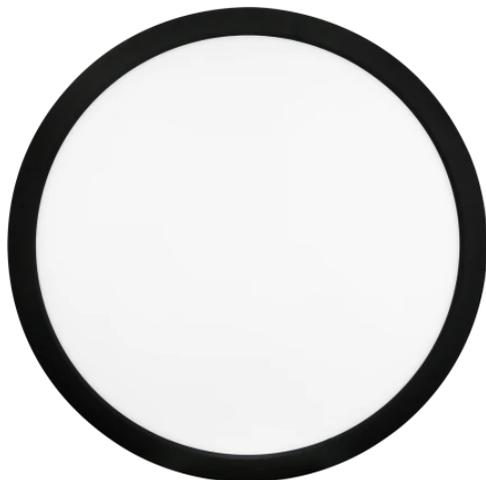
DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K) 18/21/24W 2000lm round IP20 black LITE

Downlight EASY FLEX 18-21-24W CCT 2000lm is an innovative round-shaped LED housing, made in classic black colours. It generates a light stream of 2,000 lumens, offering flexibility for power selection – 18W, 21W or 24W. The built-in colour temperature change function (3000K, 4000K and 5000K) allows to adjust the lighting atmosphere according to individual needs.

| 3 WARRANTY | IP 20 | IK 05 | PF 0,9 | 220–240V AC | | MAX −20÷40°C | CE |

Technical data

| Parameter	Value		Parameter	Value
Energy efficiency class 2019/2015	E		Colour consistency in McAdam ellipses	≤6
Warranty	3		Frequency of the supply voltage	50/60Hz
Power	• 18 W • 21 W • 24 W		Beam angle	120
			LED type	SMD2835
			LED quantity	168
			Number of on/off cycles	15000
Voltage	• 220-240 V AC		Lamp's warm-up time to 60%	1
			Ambient temperature suitable for operation	-20÷40
Correlated colour temperature	• 3000 K • 4000 K • 5000 K		For indoor use	Inside
			Installation method	3in1 surface mounted, flush mounted, suspended
Colour of the light	CCT		Mounting hole diameter	65-240
Colour rendering index Ra	80		Height	17 mm
IP protection rating	IP20		Fixture's diameter	300 mm
IK protection rating	05		Weight	0,63 kg
IEC protection class	II		Colour	Black
Luminous efficacy	83			
Luminous flux	2000			
The lumen maintenance factor	96			
Lifetime L70B50	30 000 h			
Survival factor	0.9			

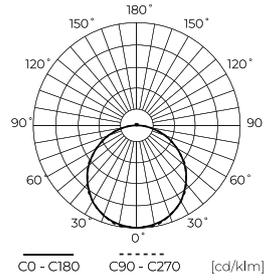LED line LITE   Code: 210011   EAN: 5905378210011

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K) 18/21/24W 2000lm round IP20 black LITE

Technical drawing

ø300   17
ø65-240

Light distribution

180°
150°   150°
120°   120°
90°   90°
60°   60°
30°   30°
0°

C0 - C180   C90 - C270   [cd/klm]

Additional product photos

Logistics data

Single packaging

Width	31 mm
Height	305 mm
Length	305 mm
Weight	0,55 kg

Bulk packaging

Quantity	10
Width	325 mm
Height	325 mm
Length	335 mm
Weight	8,42 kg

Europallet

Bulk quantity	240

LED line LITE   Code: 210011   EAN: 5905378210011

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K) 18/21/24W 2000lm round IP20 black LITE

Example application